


|                          |  |               |   |
|--------------------------|--|---------------|---|
| <b>Product</b>           | Monoseal WSE-175F  |               |   |
| <b>Description</b>       | Monoseal WSE-175F is a single piece liner that provides a weld seal to PE containers. This liner will work with most applications including Food, Cosmetic and Pharma.   |               |   |
| <b>Composition</b>       | <b>Material</b>  | <b>Metric</b> |  |
|                          | Polyester Film   | 0.0120 mm     |   |
|                          | Polyolefin Foam  | 0.1750 mm     |   |
|                          | Aluminium Foil   | 0.0250 mm     |   |
|                          | Polyester Film   | 0.0120 mm     |   |
|                          | Sealing Layer  | 0.0500 mm     |   |
| <b>Overall</b>           | <b>0.2740 mm</b>   |               |   |
| <b>FDA Status :</b>      | 21 CFR 177.1210 "Closures with sealing gaskets for food containers"  |               |   |
| <b>GTR Oxygen</b>        | < 0.01 g/m2 .day   | <b>MVTR</b>   | <0.01cc/m2 .day   |
| <b>Storage and Usage</b> | The ideal temperature for storage and transport is 15 - 30 Centigrade and 40 - 60% relative humidity without high pressure. Failure to store the goods at the recommended storage condition may lead to unexpected failure of the material and not covered by any implied or actual warranty. A full copy of the recommended storage and transport condition are available from the Selpac office. |               |   |

Selpac materials are compliant with limitations of heavy metals in packaging per CONEG & EU 94/62/EC

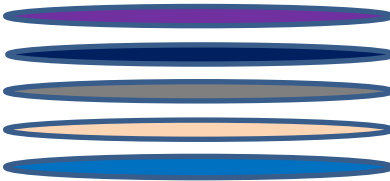