


Product	Duoseal WBT70-900PR		
Description	Duoseal WBT70-900PR is a two piece wax bonded liner that provides a weld seal to PET/APET/CPET containers. This liner will separate leaving a foil seal across the neck and backing reseal board in the cap		
Composition	Material	Metric	
	White lined Pulp	0.9000 mm	
	Polyester Barrier	0.0120 mm	
	Wax Layer	Specific to Application	
	Paper Layer	65.0000 gsm	
	Aluminium Foil	0.0250 mm	
	Polyester Barrier	0.0130 mm	
	Sealing Layer	0.0150 mm	
	Overall	0.9650 mm	
FDA Status :	21 CFR 177.1210 "Closures with sealing gaskets for food containers"		
GTR Oxygen	< 0.01 g/m2 .day	MVTR	<0.01cc/m2 .day
Storage and Usage	The ideal temperature for storage and transport is 15 - 30 Centigrade and 40 - 60% relative humidity without high pressure. Failure to store the goods at the recommended storage condition may lead to unexpected failure of the material and not covered by any implied or actual warranty. A full copy of the recommended storage and transport condition are available from the Selpac office.		

Selpac materials are compliant with limitations of heavy metals in packaging per CONEG & EU 94/62/EC



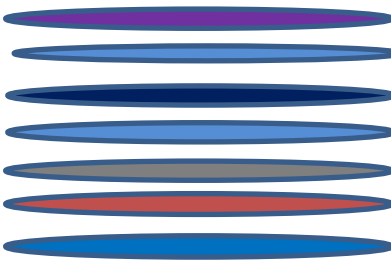

Selpac Europe Ltd
Tishon House, Warrington Road
High Legh, Knutsford
Cheshire, WA16 0RT
Registered in England No: 6973836

Tel: +44 (0)1925 752600
Fax: +44 (0)1925 753395
Email: sales@selpac-europe.com
Web: www.selpac-europe.com
F20 Issue 1