


<b>Product</b>	Duoseal WSE90-700PR		
<b>Description</b>	Duoseal WSE90-700PR is a two piece wax bonded liner that provides a weld seal to PE/HDPE containers. This liner will separate leaving a foil seal across the neck and backing reseal board in the cap		
<b>Composition</b>	<b>Material</b>	<b>Metric</b>	
	White lined Pulp	0.7000 mm	
	Polyester Barrier	0.0120 mm	
	Wax Layer	Specific to Application	
	Paper Layer	90.0000 gsm	
	Aluminium Foil	0.0250 mm	
	Polyester Barrier	0.0120 mm	
	Sealing Layer	0.0500 mm	
	<b>Overall</b>	<b>0.7990 mm</b>	
<b>FDA Status :</b>	21 CFR 177.1210 "Closures with sealing gaskets for food containers"		
<b>GTR Oxygen</b>	< 0.01 g/m <sup>2</sup> .day	<b>MVTR</b>	<0.01cc/m <sup>2</sup> .day
<b>Storage and Usage</b>	The ideal temperature for storage and transport is 15 - 30 Centigrade and 40 - 60% relative humidity without high pressure. Failure to store the goods at the recommended storage condition may lead to unexpected failure of the material and not covered by any implied or actual warranty. A full copy of the recommended storage and transport condition are available from the Selpac office.		

Selpac materials are compliant with limitations of heavy metals in packaging per CONEG & EU 94/62/EC



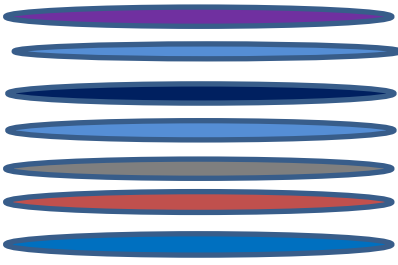

Selpac Europe Ltd  
Tishon House, Warrington Road  
High Legh, Knutsford  
Cheshire, WA16 0RT  
Registered in England No: 6973836

Tel: +44 (0)1925 752600  
Fax: +44 (0)1925 753395  
Email: [sales@selpac-europe.com](mailto:sales@selpac-europe.com)  
Web: [www.selpac-europe.com](http://www.selpac-europe.com)  
F20 Issue 1