


<b>Product</b>	Duoseal N-PLU2-1000F		
<b>Description</b>	Duoseal N-PLU2-1000F is a two piece waxless liner that provides a weld seal to Glass and most plastics. This liner will separate leaving a foil seal across the neck and backing reseal board in the cap		
<b>Composition</b>	<b>Material</b>	<b>Metric</b>	
	EPE Foam	1.0000 mm	
	Polyester Layer	0.0120 mm	
	Polyolefin	0.0250 mm	
	Aluminium Foil	0.0250 mm	
	Sealing Layer	0.0250 mm	
<b>Overall</b>	<b>1.0870 mm</b>		
<b>FDA Status :</b>	21 CFR 177.1210 "Closures with sealing gaskets for food containers"		
<b>GTR Oxygen</b>	< 0.01 g/m <sup>2</sup> .day	<b>MVTR</b>	<0.01cc/m <sup>2</sup> .day
<b>Storage and Usage</b>	The ideal temperature for storage and transport is 15 - 30 Centigrade and 40 - 60% relative humidity without high pressure. Failure to store the goods at the recommended storage condition may lead to unexpected failure of the material and not covered by any implied or actual warranty. A full copy of the recommended storage and transport condition are available from the Selpac office.		

Selpac materials are compliant with limitations of heavy metals in packaging per CONEG & EU 94/62/EC

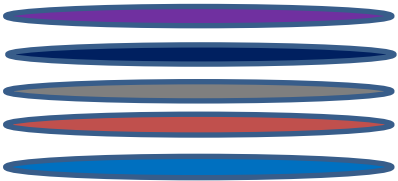