
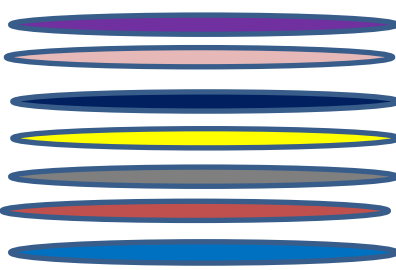
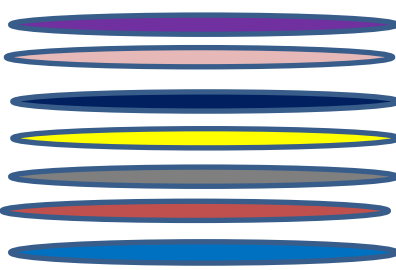


Product	Duo Peel PLSE-90-700PR																						
Description	Duo Peel PLSE-90-700PR is a two piece liner that provides a clean peel seal to PE containers. This liner will separate leaving a foil seal across the neck and backing reseal board in the cap																						
Composition	<table border="1"> <thead> <tr> <th style="text-align: left;">Material</th> <th style="text-align: left;">Metric</th> <th></th> </tr> </thead> <tbody> <tr> <td>White Pulp</td> <td>0.7000 mm</td> <td rowspan="8">  </td> </tr> <tr> <td>Polyester Layer</td> <td>0.0120 mm</td> </tr> <tr> <td>Wax Layer</td> <td>Application Specific</td> </tr> <tr> <td>Paper Layer</td> <td>90.0000 gsm</td> </tr> <tr> <td>Aluminium Foil</td> <td>0.0250 mm</td> </tr> <tr> <td>Polyester Barrier</td> <td>0.0120 mm</td> </tr> <tr> <td>Sealing Layer</td> <td>0.0450 mm</td> </tr> <tr> <td>Overall</td> <td>0.7940 mm</td> </tr> </tbody> </table>	Material	Metric		White Pulp	0.7000 mm		Polyester Layer	0.0120 mm	Wax Layer	Application Specific	Paper Layer	90.0000 gsm	Aluminium Foil	0.0250 mm	Polyester Barrier	0.0120 mm	Sealing Layer	0.0450 mm	Overall	0.7940 mm		
Material	Metric																						
White Pulp	0.7000 mm																						
Polyester Layer	0.0120 mm																						
Wax Layer	Application Specific																						
Paper Layer	90.0000 gsm																						
Aluminium Foil	0.0250 mm																						
Polyester Barrier	0.0120 mm																						
Sealing Layer	0.0450 mm																						
Overall	0.7940 mm																						
FDA Status :	21 CFR 177.1210 "Closures with sealing gaskets for food containers"																						
GTR Oxygen	< 0.01 g/m2 .day	MVTR	<0.01cc/m2 .day																				
Storage and Usage	The ideal temperature for storage and transport is 15 - 30 Centigrade and 40 - 60% relative humidity without high pressure. Failure to store the goods at the recommended storage condition may lead to unexpected failure of the material and not covered by any implied or actual warranty. A full copy of the recommended storage and transport condition are available from the Selpac office.																						

Selpac materials are compliant with limitations of heavy metals in packaging per CONEG & EU 94/62/EC

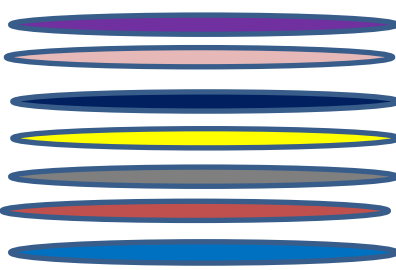