


<b>Product</b>	Monoseal WSP-R-230F		
<b>Description</b>	Monoseal WSP-R-230F is a single piece liner that provides a weld seal to PP and Barrier PP containers. This liner will work with hot fill applications and retort to 121°C for 60 minutes.		
<b>Composition</b>	<b>Material</b>	<b>Metric</b>	
	Polyester Film	0.0120 mm	
	Polyolefin Foam	0.2300 mm	
	Aluminium Foil	0.0250 mm	
	Polyester Film	0.0120 mm	
	Sealing Layer	0.0600 mm	
	<b>Overall</b>	<b>0.3390 mm</b>	
<b>FDA Status :</b>	21 CFR 177.1210 "Closures with sealing gaskets for food containers"		
<b>GTR Oxygen</b>	< 0.01 g/m <sup>2</sup> .day	<b>MVTR</b>	<0.01cc/m <sup>2</sup> .day
<b>Storage and Usage</b>	The ideal temperature for storage and transport is 15 - 30 Centigrade and 40 - 60% relative humidity without high pressure. Failure to store the goods at the recommended storage condition may lead to unexpected failure of the material and not covered by any implied or actual warranty. A full copy of the recommended storage and transport condition are available from the Selpac office.		

Selpac materials are compliant with limitations of heavy metals in packaging per CONEG & EU 94/62/EC

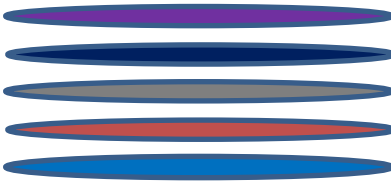