
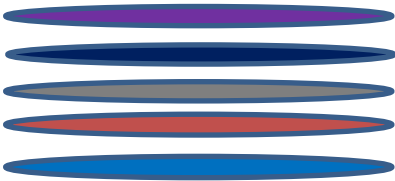
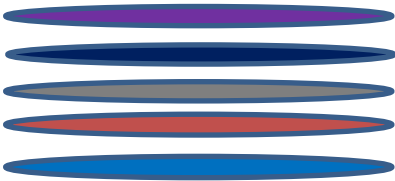


Product	Duoseal WSE-900P																			
Description	Duoseal WSE-900P is a two piece wax bonded liner that provides a weld seal to PE/HDPE containers. This liner will separate leaving a foil seal across the neck and backing reseal board in the cap																			
Composition	<table border="1" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Material</th> <th style="text-align: left;">Metric</th> <th></th> </tr> </thead> <tbody> <tr> <td>White lined Pulp</td> <td>0.9000 mm</td> <td rowspan="5" style="text-align: center;">  </td> </tr> <tr> <td>Wax Layer</td> <td>Specific to Application</td> </tr> <tr> <td>Aluminium Foil</td> <td>0.0250 mm</td> </tr> <tr> <td>Polyester Barrier</td> <td>0.0130</td> </tr> <tr> <td>Sealing Layer</td> <td>0.0500 mm</td> </tr> <tr> <td>Overall</td> <td>0.9880 mm</td> <td></td> </tr> </tbody> </table>	Material	Metric		White lined Pulp	0.9000 mm		Wax Layer	Specific to Application	Aluminium Foil	0.0250 mm	Polyester Barrier	0.0130	Sealing Layer	0.0500 mm	Overall	0.9880 mm			
Material	Metric																			
White lined Pulp	0.9000 mm																			
Wax Layer	Specific to Application																			
Aluminium Foil	0.0250 mm																			
Polyester Barrier	0.0130																			
Sealing Layer	0.0500 mm																			
Overall	0.9880 mm																			
FDA Status :	21 CFR 177.1210 "Closures with sealing gaskets for food containers"																			
GTR Oxygen	< 0.01 g/m2 .day	MVTR	<0.01cc/m2 .day																	
Storage and Usage	The ideal temperature for storage and transport is 15 - 30 Centigrade and 40 - 60% relative humidity without high pressure. Failure to store the goods at the recommended storage condition may lead to unexpected failure of the material and not covered by any implied or actual warranty. A full copy of the recommended storage and transport condition are available from the Selpac office.																			

Selpac materials are compliant with limitations of heavy metals in packaging per CONEG & EU 94/62/EC

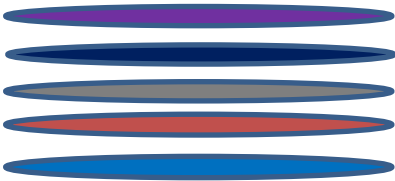